
MATRIX | WIND TUNNEL

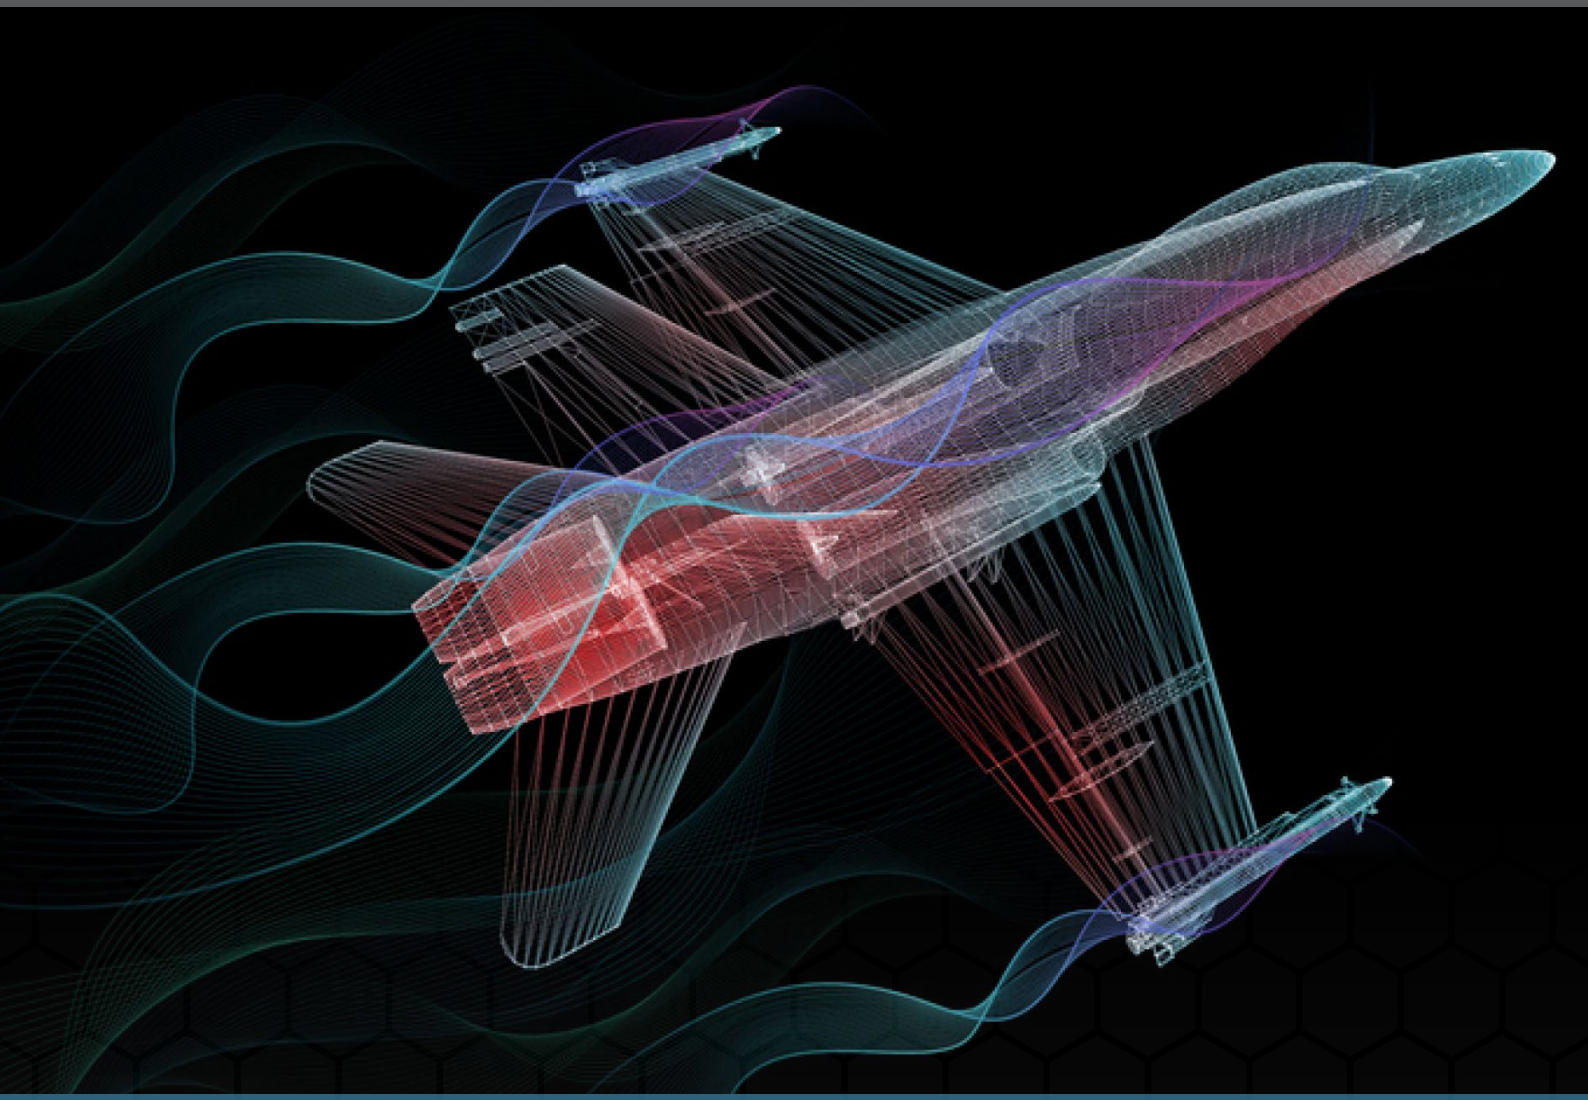

AERODYNAMICS

CP0704

Inspiring The Next Generation Of Engineers

www.matrixtsl.com

Copyright © 2023-2026 Matrix Technology Solutions Limited

Introduction

Introduction	**3**
Worksheets	
Worksheet 1 – Pitot-static Tube	9
Worksheet 2 – Flow Patterns around a Cylinder	11
Worksheet 3 – Flow Patterns around an Aerofoil	14
Worksheet 4 – Lift and Drag on an Aerofoil	17
Worksheet 5 – Drag Coefficient	19
Worksheet 6 – Streamlined?	21
Worksheet 7 – Where next?	22
Student Handout	**23**

Copyright © 2023-2026 Matrix Technology Solutions Limited

Introduction


Wind Tunnel

Dimensions: 125mm x 125mm x 350mm
Test section cross sectional area: 125mm x 125mm.
Max Air speed in test section = 35.7m/s.





Transparent test section

Moving LED lights mimic air flow

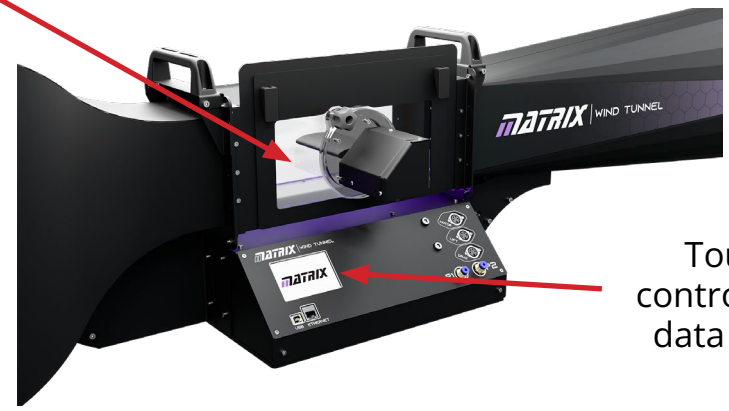

Touch-screen panel controls air flow & built in data acquisition system

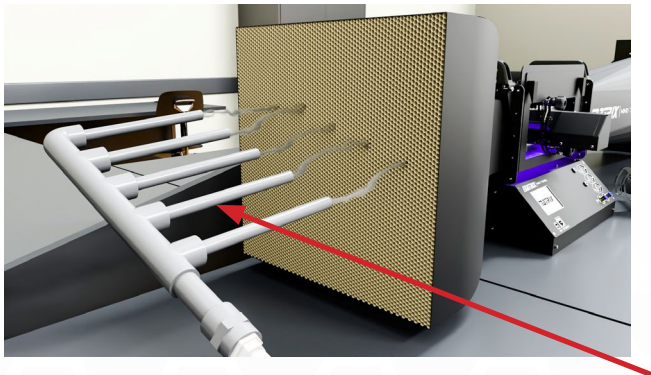

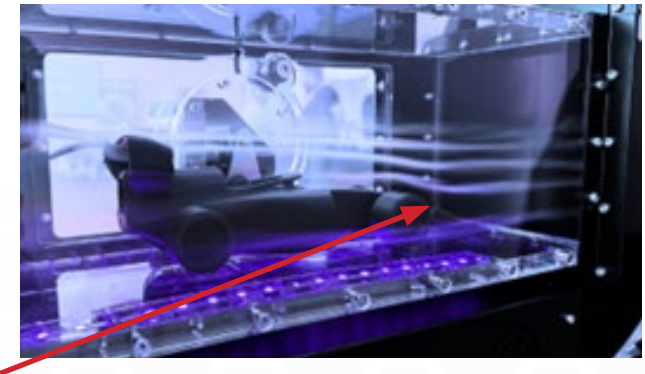

A smoke generator shows flow patterns around test objects.

Copyright © 2023-2026 Matrix Technology Solutions Limited

Wind Tunnel Overview

Components

Pitot Static Tube



Pressure Tapped Cylinder



Pressure Tapped Aerofoil



2 Force Control Box



3 data acquisition cables 2 x 4 pin male cable and 1 x 5 pin male cable



Smoke Machine, Tubing & Smoke Rake



Copyright © 2023-2026 Matrix Technology Solutions Limited

Wind Tunnel Overview

Manometer & Holding Plate



Connection points for manometer to holding plate

IEC Mains Lead



2M USB2 Type A Male – Type B Mail



Data Acquisition Box

Copyright © 2023-2026 Matrix Technology Solutions Limited

Wind Tunnel Overview

Test Specimens


6 X Drag Test Specimens



3 X Aerofoil Specimens



Aerofoil Profiles

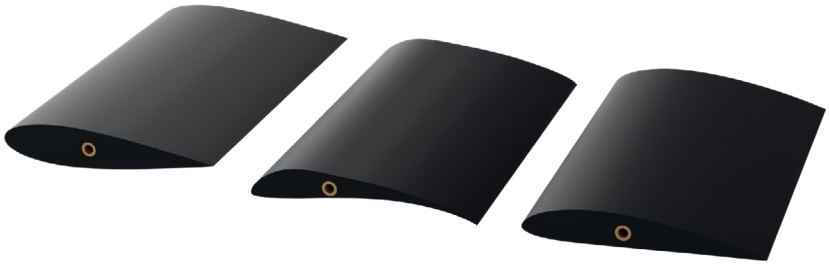

NACA0015 S1223 NACA4415

STEM Racing Car Bracket *STEM Racing car not included*



2 force modules with adjustable clamp and locking nut.




Copyright © 2023-2026 Matrix Technology Solutions Limited

Hardware Setup

Securing Test Specimens to Test Chamber

The Data Acquisition Box can be controlled using the touch screen interface. When the device powers up it will show a home screen containing the main menu.

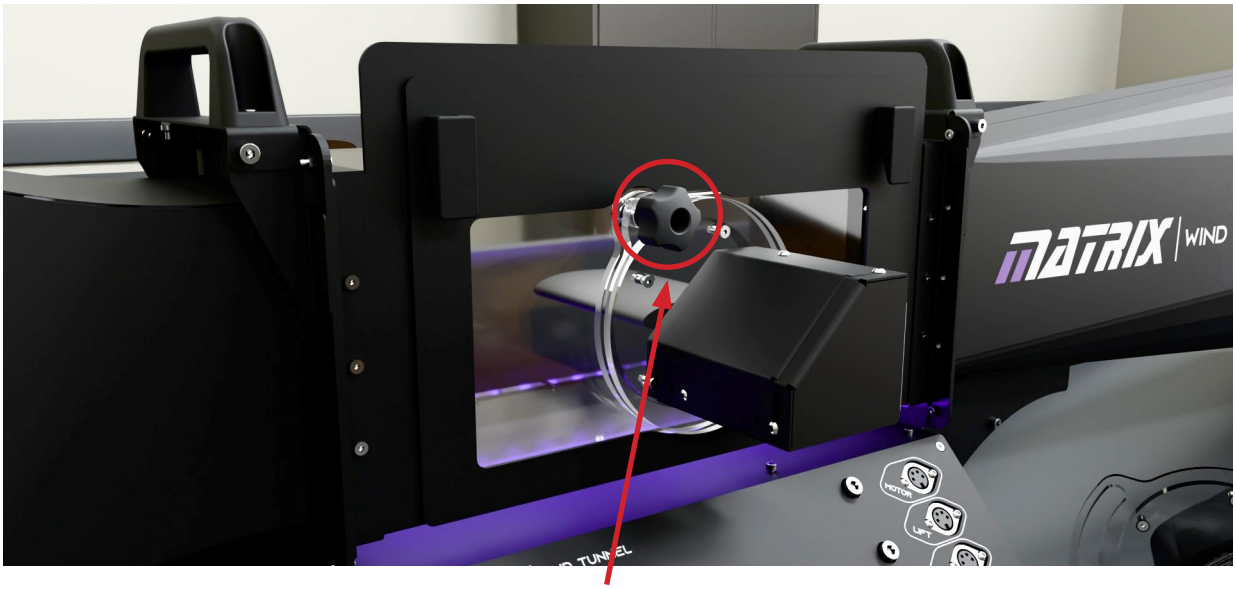


Secure test specimens by tightening thumb nuts.


Using the U-tube Manometer

1. Place the pitot-static tube experiment holder into the wind tunnel test area and secure it with the two thumb-nuts, as shown in the diagram.
2. Make sure that the tube points directly into the air flow.
3. Add water to the manometer via one of the ports identified in the diagram below so that the water level sits at near 50.


(It doesn't matter which tube goes to which port. The important thing is the difference in the heights of the water columns.)

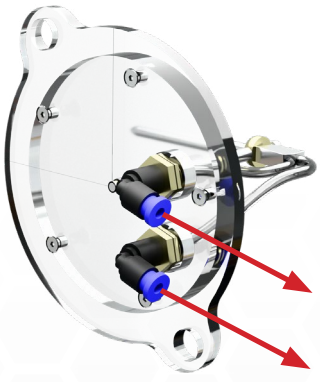

To manometer

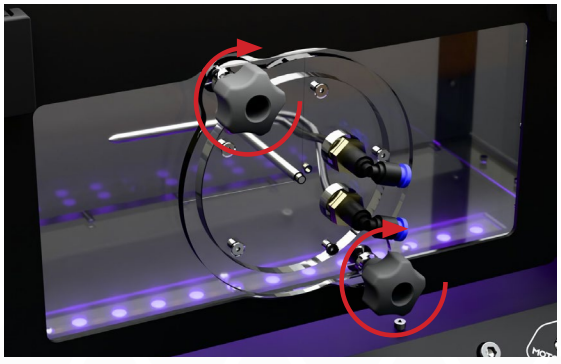

Thumb nuts

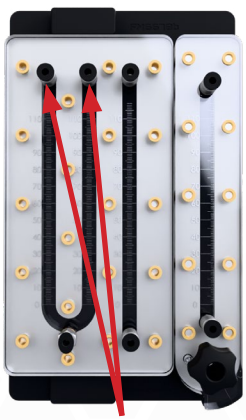

Add water via one of these ports

Copyright © 2023-2026 Matrix Technology Solutions Limited


WORKSHEETS

Copyright © 2023-2025 Matrix Technology Solutions Limited

WORKSHEETS

Worksheet 1 – Pitot Static Tube


Pitot-static tubes are used in vehicles such as aircraft and racing cars to monitor air speed and hence the speed of the vehicle.
They compare the pressure created in a tube, (the pitot tube,) facing directly into the fluid flow, with the static pressure around it.
The faster the fluid flow, the greater this pressure difference.

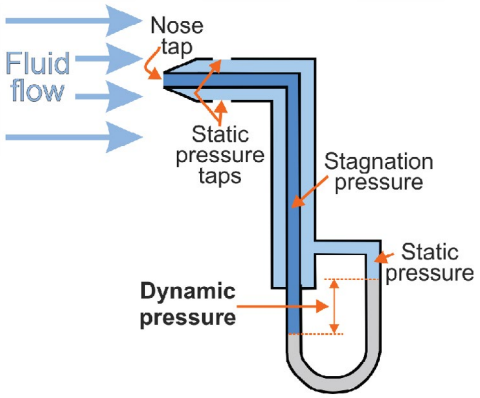


Over To You

1. **Using the U-tube manometer**:

- Place the pitot-static tube experiment holder into the wind tunnel test area and secure it with the two thumb-nuts, as shown in the diagram.
- Make sure that the tube points directly into the air flow.
- Add water to the manometer via one of the ports identified in the diagram below so that the water level sits at near 50.

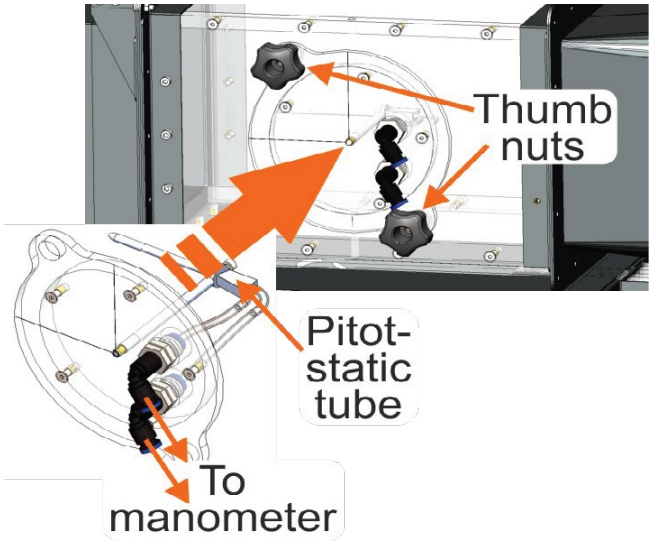

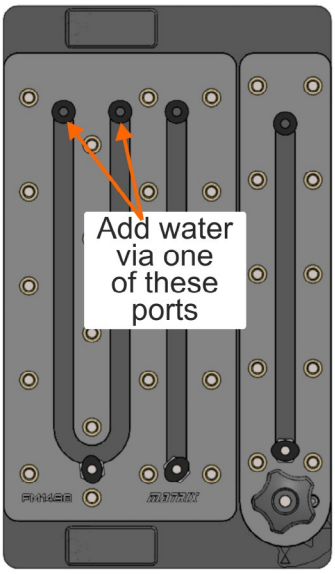

- Connect the experiment holder to the 'U' tube manometer.
- (It doesn't matter which tube goes to which port. The important thing is the difference in the heights of the water columns.)
- Measure the initial heights of the water columns in the manometer (i.e. at 0% fan speed).
- Record the measurement in the table in the Student Handout.

Copyright © 2023-2026 Matrix Technology Solutions Limited

- Switch on the air flow in the wind tunnel by pressing the 'speed-up' button and set the fan speed to 10%. (On switch-on, it starts at 10% automatically.)
- Again, measure the heights of the water columns.
- Increase the fan speed in steps of 10% up to a speed of 100%. Each time, measure the water column heights.
- Record all measurements in the Student Handout.

So What

Using Bernoulli's equation, we predict that:

$$\mathbf{V}^2 = \frac{2\,(\rho w \times g \times \mathbf{h})}{\rho a}$$

where **V** = air speed,
ρw= density of water (taken to be 1000kg.m-3)
g = gravitational field strength = 9.81N.kg-1
h = manometer height difference in metres,
ρa= density of air (taken to be 1.20 kg.m-3).

- For each value of fan speed, calculate:
  - the manometer height difference, **h**, ***in metres***;
  - the air speed, **V**, using the above formula.
- Use these results to plot a graph of air speed against height difference. Draw a smooth curve, using your points as a guide.

2. Using the digital pressure meter:

- Now detach the tubes from the manometer and instead connect them to the ports on the control unit. Once again, it doesn't matter which way round you connect them. (It's the magnitude that matters, so ignore minus signs! Ideally though its negative, as the pressure decreases with velocity)
- Zero the sensors on the control panel.
- Take a series of readings of air speed and (modulus of) pressure difference shown on the digital pressure meter, as before, but for fan speeds from 10% to 100%.
- Record all measurements in the Student Handout.

So What

- Plot another graph of air speed against pressure difference, this time using the digital pressure meter readings. Again, draw a smooth curve through the points.
- Calculate the Reynolds number for each fan speed percentage.

Copyright © 2023-2026 Matrix Technology Solutions Limited

WORKSHEETS


Worksheet 2 – Flow Patterns Around a Cylinder


When designing ships, aircraft, cars etc. the aim is usually to reduce drag and other frictional forces in order to increase the vehicle's speed, or reduce its energy consumption.
Important factors in this include the profile that the vehicle presents to the fluid flow and the speed of the flow.



Over To You

The object is a cylinder, with a hole on its surface, connected to a shaft running down its centre. The cylinder is attached to a circular protractor.

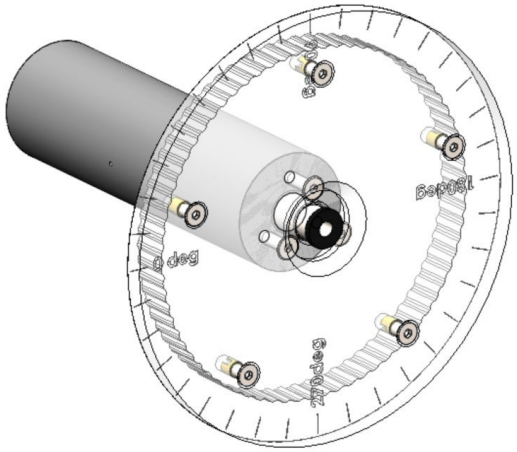

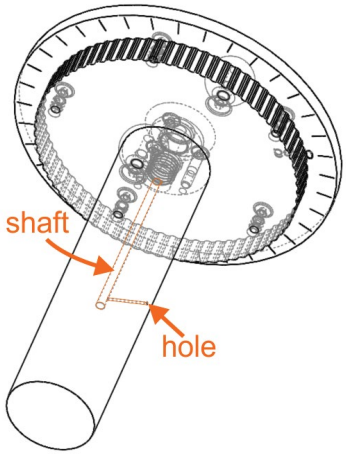

- Place the cylinder holder into the wind tunnel test area and secure it with the thumb-nuts.
- The holder has a twisting mechanism that allows the cylinder to be rotated in 5^0 steps.
- Rotate it to an angle of attack, **θ**, of 0^0 relative to the air flow. (In this position, the 900 scale marker lines up with the vertical marker on the test window.)
- Connect the pressure port on the holder to one of the ports on the control unit. Leave the other port open to ambient pressure.
- Zero the pressure sensor on the control panel, when the fan speed is zero.
- Turn on the fan and set it to 20%.
- Read the air speed and pressure, shown on the digital pressure meter.
- Rotate the cylinder in its holder to an angle, **θ**, of 5^0 and repeat the procedure.
- Increase the angle of attack in steps of 5^0 up to an angle of 1800.
- Each time, observe the resulting pressure reading.
- Record all measurements in the Student Handout.

Copyright © 2023-2026 Matrix Technology Solutions Limited

So What

Significant factors in determining the flow pattern that we see around objects placed in a fluid stream include:

- the Reynolds number, R_e, for the flow, which depends on dimensions, such as the diameter of the cylinder, and on the velocity and properties of the fluid;
- the pressure coefficient, C_p, used to obtain the pressure distribution around an object immersed in a fluid.

It can be shown that:

$$C_p = \frac{(\mathbf{P} - P\infty)}{\frac{1}{2}\rho\mathbf{V}^2}$$

where
P = pressure in Pa at a particular point on the surface of the body

P∞ = free-stream pressure of the fluid (i.e. undisturbed by the presence of the object). This is found from the results of the first worksheet, which used the pitot-static tube to measure the free-stream (undisturbed) air pressure for a range of air speeds

ρ = density of the fluid, air in this case, taken to be 1.20 $kg.m^{-3}$

V = velocity of the fluid.

- Use this equation to calculate pressure coefficient values for each angle of attack. (the two values of pressure should both have negative signs)

- Plot a graph of pressure coefficient versus angle of attack, **θ**, for this value of air speed. (If you use a spreadsheet such as Excel to obtain the graph, you may have to convert the angles from degrees into radians. (1 degree = 0.017 radians.))

- Compare the results to the theoretical curve, explain the difference between them.

Copyright © 2023-2026 Matrix Technology Solutions Limited


WORKSHEETS

Worksheet 2 – Flow Patterns Around a Cylinder

So What

The pressure distribution around an object is often presented in the form shown below:

- Negative pressure is indicated by the arrows flowing away from the object.
- For a positive pressure, the arrows flow towards the object.

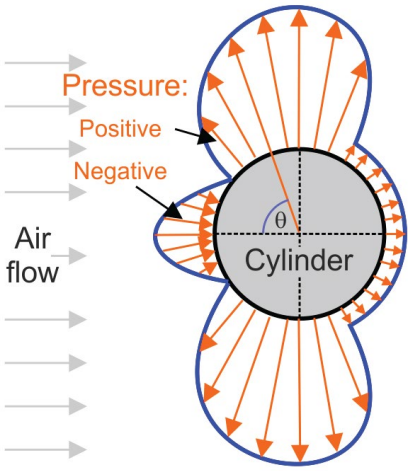

- Use your results to create a pressure distribution diagram of this type.
  - A template is provided in the Student Handout. Your measurements cover only the range from 0^0 to 180^0. The pattern is symmetrical so you can complete it if you wish.

- Compare this diagram with the graph you plotted earlier. In the Student Handout, comment on this comparison.

Challange

Obtain pressure distribution graphs for fan speeds of 50%, 80% and 100%.

Copyright © 2023-2026 Matrix Technology Solutions Limited


WORKSHEETS

Worksheet 3 – Flow Patterns Around an Aerofoil


When a fluid flows around an object, it can generate nett forces that cause the object to rise or fall.
The shape (profile) that the object presents determines the size of these forces.
An aerofoil exploits this effect, giving aircraft lift, wind turbines rotation and ship propellers thrust.



This investigation explores the pressure distribution around a model aerofoil, with a shape known as NACA0015.

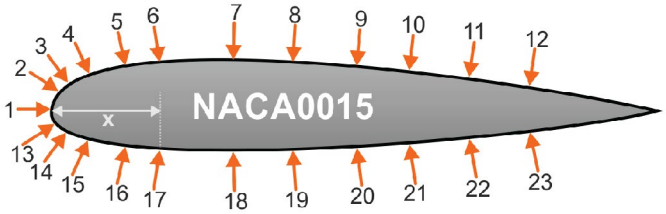

Tappings



Pressure Ports

Twenty-three tappings (holes) along the surface of the aerofoil lead through internal tubes to ports which can be connected to a pressure meter.
In this way, we can take static pressure readings over the surface of the aerofoil.

Over To You

- Place the aerofoil holder into the wind tunnel test area and secure it with thumb-nuts.
- Turn the aerofoil to an angle of attack of 0^0 (relative to the air flow).
- Zero the sensors on the control panel.
- Turn on the fan and set the speed to 25%.
- Connect tapping '1' to port 1 on the control box.
- Leave the other port open to ambient pressure.
- Read the air speed and pressure, shown on the digital pressure meter for that point on the aerofoil.
- Record it in the table in the Student Handout.
- Remove the tapping tube form the port, and repeat this process for the other aerofoil tappings.

Copyright © 2023-2026 Matrix Technology Solutions Limited

WORKSHEETS

Worksheet 3 – Flow Patterns Around an Aerofoil

So What

To make it easier to scale the results to other aerofoils, the distance from the front of the aerofoil to the tapping is recorded as a fraction of the length of the aerofoil chord, in this case 60mm.
The table shows this fractional distance, x, for each of the tappings:

Pressure Tapping	1	2 13	3 14	4 15	5 16	6 17	7 18	8 19	9 20	10 21	11 22	12 23
Distance along chord in mm	0	0.6	1.6	3.8	7.4	10.8	18.3	24.2	30.7	35.9	41.8	47.7
Fractional distance x along chord	0	0.01	0.03	0.06	0.12	0.18	0.30	0.40	0.51	0.60	0.70	0.80

Notice that tappings 2 and 13, 3 and 14 etc., lie at the same distance along the chord, one on the top surface and one on the lower surface.

The parameter pressure coefficient, $\mathbf{C_p}$, used to describe the pressure variation across an aerofoil is calculated from the formula given earlier:

$$\mathbf{C_p} = \frac{\mathbf{P} - P\infty}{\frac{1}{2}\rho\,\mathbf{V}^2}$$


where **P** = pressure at wing tapping in Pa
P∞ = free-stream pressure of the fluid, found, again, from the first worksheet results
ρ = density of air, taken as 1.20 kg.m^{-3}
V = air speed

- Use this formula to calculate the pressure coefficient at each tapping and add the result to the table in the Student Handout.
- Use the results to plot a pressure distribution graph, $\mathbf{C_p}$ versus **x**, for the ***top*** surface of the aerofoil.
- On the same axes, plot a pressure distribution graph for the ***lower*** surface.
- Comment on what these graphs show.

Copyright © 2023-2026 Matrix Technology Solutions Limited

So What

Once again, it is customary to show these results in a pressure distribution diagram, like the one shown below.

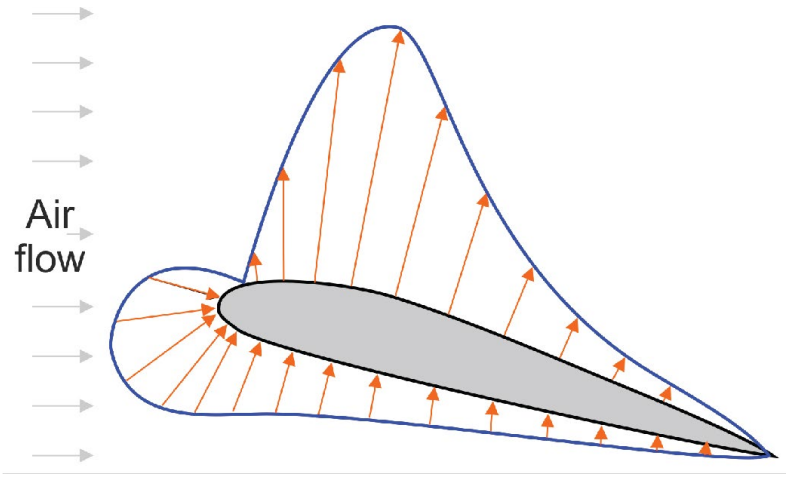

- Use your results to plot a pressure distribution graph, $\mathbf{C_P}$ versus **x**, using the 0^0 template provided in the Student Handout. (The positions of the tappings are shown on the template.)

- Change the angle of attack of the aerofoil to 5^0 and repeat the procedure. Use the results to plot a pressure distribution graph on the 5^0 template provided in the Student Handout.

- Now set the angle of attack to 12^0 and repeat the process.

Challange


In the same way, obtain a set of pressure distribution graphs for fan speeds of 50%, 80% and 100%.

Copyright © 2023-2026 Matrix Technology Solutions Limited


WORKSHEETS

Worksheet 4 – Lift and Drag on an Aerofoil

The shape of the aerofoil causes the streamlines of air flowing around it to curve.
This requires a pressure gradient across the air flow, leading to lower air pressure on top of the aerofoil than underneath.
The result - an upward force on the aerofoil - we call it lift.

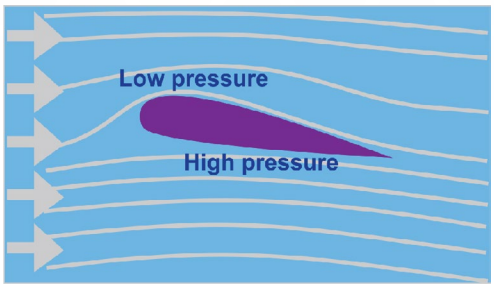


This experiment requires the 'two-force' module holder, shown opposite.

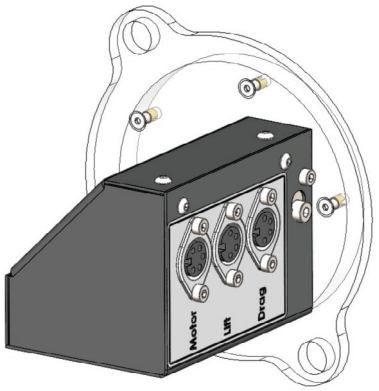

It contains:

- two built-in load cells, one to measure lift forces and the other drag forces;
- a stepper motor to adjust the angle of attack of the aerofoil.

The aerofoils provided with the kit are also shown, with the names of their profiles.
Each has a threaded insert. Twist this onto the shaft on the end of the holder and then attach it to the test section of the wind tunnel using the thumb-nuts.
Use the cables provided to attach the sockets on the holder to the corresponding sockets on the control unit.

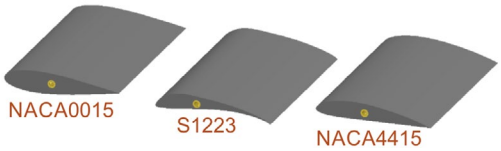

Over To You

- Attach the NACA0015 aerofoil to the holder and place it in the wind tunnel.
- Turn the aerofoil to an angle of attack of 0^0 (relative to the air flow).
- With the fan turned off, zero the sensors on the control panel.
- Switch on the fan and set it to a power level of 20%.
- Increase the angle of attack in steps of 5^0 from an angle of -25^0 to $+45^0$.
- Each time, read the values of lift and drag shown on the control panel and record them in the table in the Student Handout.
- Increase the fan speed to 50% and repeat the procedure.
- Then do the same at a fan speed of 80%.
- Complete the appropriate tables in the Student Handout with your results.

Copyright © 2023-2026 Matrix Technology Solutions Limited

WORKSHEETS

Worksheet 4 – Lift and Drag on an Aerofoil

So What

- On the same axes, plot graphs of lift force versus angle of attack for the three air speeds and label each. Draw smooth curves using the experimental points a guide.
- Then draw graphs of drag force versus angle of attack for the three air speeds.
- Comment on what these graphs show.

Over To You

- Remove the NACA0015 aerofoil and replace it with the S1223 aerofoil.
- Repeat the procedure to obtain lift and drag graphs for fan speeds of 20%, 50% and 80%.
- Then do the same for the NACA4415 aerofoil.

So What


- On the same axes, now plot a graph of lift force versus angle of attack for the three aerofoils at a wind speed of 20% to compare their aerodynamic performance.
- Then draw a second graph to compare the drag forces on each aerofoil at a fan speed of 20%.
- Comment on these comparisons.

Copyright © 2023-2026 Matrix Technology Solutions Limited


WORKSHEETS

Worksheet 5 – Drag Coefficient

Everyday speech uses the term 'streamlined' for a shape that glides easily through a fluid, such as air, experiencing minimum resistance (drag).
This investigation explores the relationship between the shape of an object and the drag forces it produces.
The drag coefficient is derived for a number of shapes. It depends on factors like the surface area and roughness of the object's surface as well as the speed of the air across it..

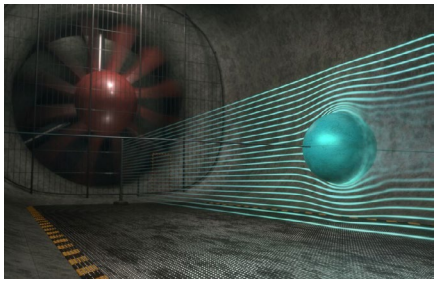

This experiment also uses the 'two-force' module holder, with each of the drag shapes shown below, attached in turn.

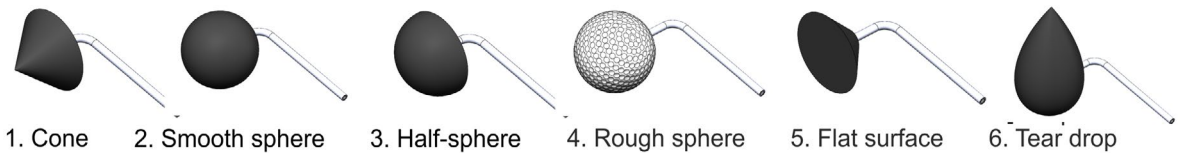

Over To You

- Attach the first shape, the cone, firmly to the 'two-force' holder using the threaded shaft.
- Place it in the test section of the wind tunnel and secure it with the thumb nuts.
- Connect the module holder to the control unit as before.
- Set the angle of attack to 0º (relative to the air flow).
- With the fan turned off, zero the sensors on the control panel.
- Switch on the fan and set it to a power level of 10%.
- Read values of air speed and drag force, shown on the control panel.
- Increase the air speed in steps of 10% up to 100%.
- Each time, read the values of air speed and drag and record them in the first table in the Student Handout.

Copyright © 2023-2026 Matrix Technology Solutions Limited

So What

- For each value of air speed, calculate the drag coefficient, using the formula:

$$\text{drag coefficient } \mathbf{C_d} = \frac{\mathbf{D}}{1/2\ \rho\ \mathbf{V}^2\ \text{x}\ \mathbf{A}}$$

where
D = drag force in N
ρ = density of air, taken as 1.20 kg.m^{-3}
V = air speed in m.s^{-1}
d = diameter of shape = 44 mm = 0.044 m

- What do you notice about the effect of air speed on the drag coefficient?

Over To You

- Repeat the same procedure for the other shapes, completing the appropriate tables in the Student Handout with your results.

So What

The following table gives theoretical values for the drag coefficients of these shapes.

Shape	Drag Coefficient
Cone	0.5
Smooth sphere	0.47
Half sphere	0.42
Rough sphere	0.2
Flat surface	1.1
Tear drop	0.04

Some of these values vary with the precise shape of the object and with the conditions under which measurements are taken.

- Compare your results with the values given in the table and comment on this in the Student Handout.
-
- In the Student Handout, answer these questions, using your results as appropriate:
  - A modern car has a drag coefficient around 0.2 to 0.3. Which of these shapes is most likely to be chosen for a streamlined car?
  - Why are golf balls dimpled?


Copyright © 2023-2026 Matrix Technology Solutions Limited

WORKSHEETS

Worksheet 6 – Streamlined?

Wind tunnels are often used to obtain images of the air flow around objects such as cars, aircraft and buildings in order to improve their design.

In this investigation, you use streams of smoke blowing around objects placed in the air stream to create these images.

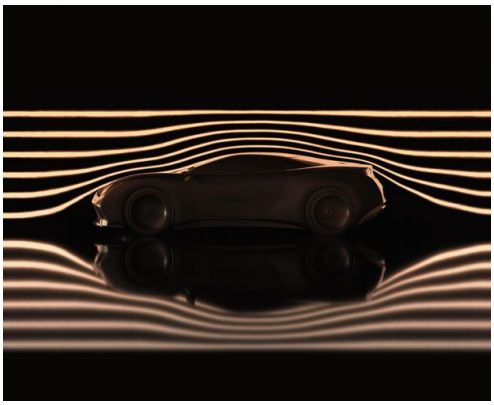

The precise procedure in this investigation depends on exactly what you want to investigate and the equipment you have at your disposal and so instructions given below amount to general guidelines only.

It is possible to take photographs that show the patterns produced by the smoke streams, but it is 'hit-and-miss' because they change rapidly.
An alternative is to create a video clip using the slow-motion facility available on many cell phones.


Over To You

- Attach the object you are interested in firmly to the 'two force' module.
- Place it in the test section of the wind tunnel at the desired angle.
- Switch on the fan at a low fan speed to begin with.
- Hold the smoke generator outlet near the centre of the wind tunnel's inlet grill.
- Adjust its position to improve the pattern of smoke flowing around the object.
- Once you are happy with the pattern, use the camera on a cell phone to take either still pictures or, preferably, slow-motion video of the smoke pattern.
- Experiment with other fan speeds and other angles of attack.

Copyright © 2023-2026 Matrix Technology Solutions Limited

WORKSHEETS


Worksheet 7 – Where Next?

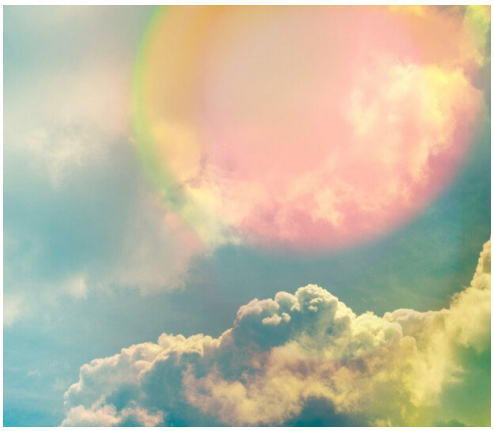

And now... over to you absolutely!
What is your area of interest:
car body shape;
aeronautics;
ship hull design;
wind turbine efficiency?
At this point, investigate a shape of your own making.

Guidelines

The size of the shape you produce is important. Keep the area exposed to the air stream to less than 10% of the cross-section of the test area of the wind tunnel, which has dimensions 125mm x 125mm.

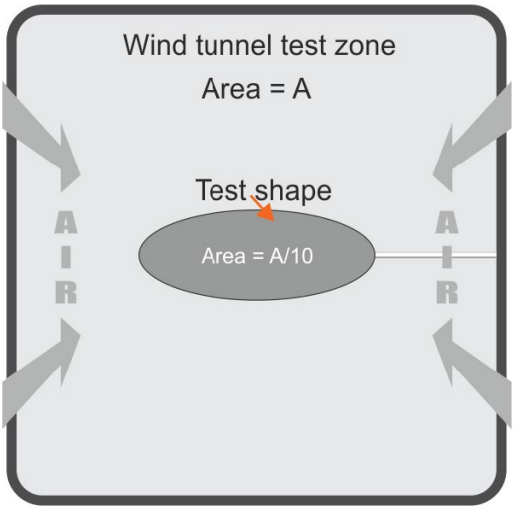

Over To You

- If you have '3-D' printed it, you may have included a tapping to sense the pressure. In that case, connect it up and proceed as in worksheet 2.
- If you are interested in the forces exerted on the shape by the air flow, proceed as in worksheets 4 and 5.
- You might be interested in the air flow around the shape, in which case proceed as in worksheet 6.

Copyright © 2023-2026 Matrix Technology Solutions Limited

STUDENT HANDOUT

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 1 - Pitot-static Tube

1. Using the U-tube manometer:

Fan speed %	Left-hand column height in mm	Right-hand column height in mm	Height difference h in m	Air speed V in $m.s^{-1}$
0				
10				
20				
30				
40				
50				
60				
70				
80				
90				
100				

2. Using the digital pressure sensor:

Fan speed %	Pressure reading in Pa	Air speed V in $m.s^{-1}$
0		
10		
20		
30		
40		
50		
60		
70		
80		
90		
100		


Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 2 - Flow Patterns Around a Cylinder

Fan speed = 20%

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
0^0		
5^0		
10^0		
15º		
20º		
25º		
30º		
35º		
40º		
45º		
50º		
55º		
60º		
65º		
70º		
75º		
80º		
85º		
90º		

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
95º		
100º		
105º		
110º		
115º		
120º		
125º		
130º		
135º		
140º		
145º		
150º		
155º		
160º		
165º		
170º		
175º		
180º		

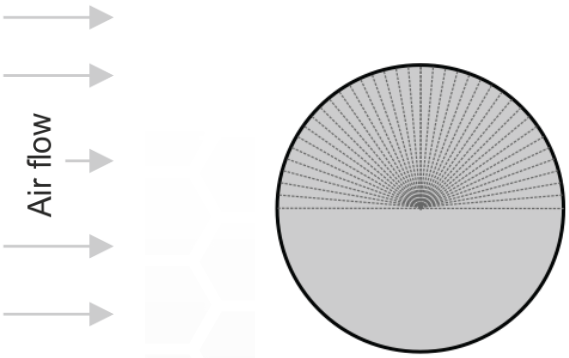

Pressure distribution diagram

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 2 - Flow Patterns Around a Cylinder

Comparing the two ways to present the pressure distribution:


Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 2 - Flow Patterns Around a Cylinder

Challenge! Fan speed = ...

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
0^0		
5^0		
10^0		
15º		
20º		
25º		
30º		
35º		
40º		
45º		
50º		
55º		
60º		
65º		
70º		
75º		
80º		
85º		
90º		

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
95º		
100º		
105º		
110º		
115º		
120º		
125º		
130º		
135º		
140º		
145º		
150º		
155º		
160º		
165º		
170º		
175º		
180º		

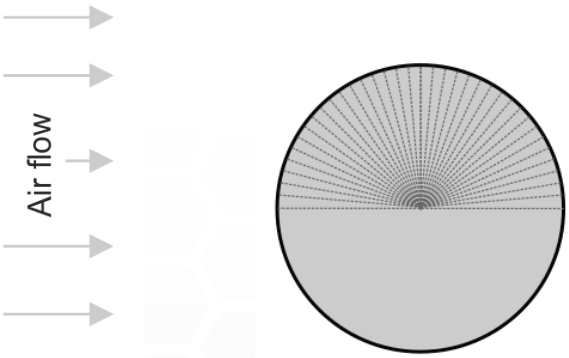

Pressure distribution diagram


Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 2 - Flow Patterns Around a Cylinder

Challenge! Fan speed = ...

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
0^0		
5^0		
10^0		
15^0		
20^0		
25^0		
30^0		
35^0		
40^0		
45^0		
50^0		
55^0		
60^0		
65^0		
70^0		
75^0		
80^0		
85^0		
90^0		

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
95^0		
100^0		
105^0		
110^0		
115^0		
120^0		
125^0		
130^0		
135^0		
140^0		
145^0		
150^0		
155^0		
160^0		
165^0		
170^0		
175^0		
180^0		

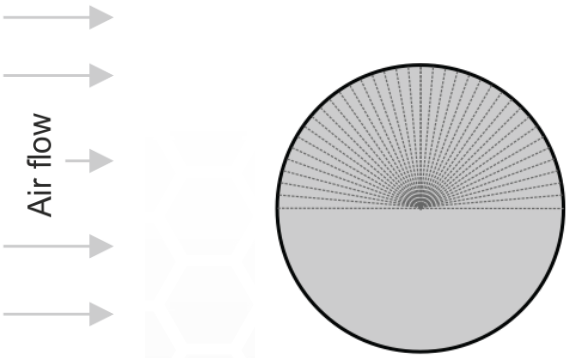

Pressure distribution diagram


Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 2 - Flow Patterns Around a Cylinder

Challenge! Fan speed = ...

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
0^0		
5^0		
10^0		
15^0		
20^0		
25^0		
30^0		
35^0		
40^0		
45^0		
50^0		
55^0		
60^0		
65^0		
70^0		
75^0		
80^0		
85^0		
90^0		

Angle of attack	Pressure difference in Pa	Pressure coefficient Cp
95^0		
100^0		
105^0		
110^0		
115^0		
120^0		
125^0		
130^0		
135^0		
140^0		
145^0		
150^0		
155^0		
160^0		
165^0		
170^0		
175^0		
180^0		

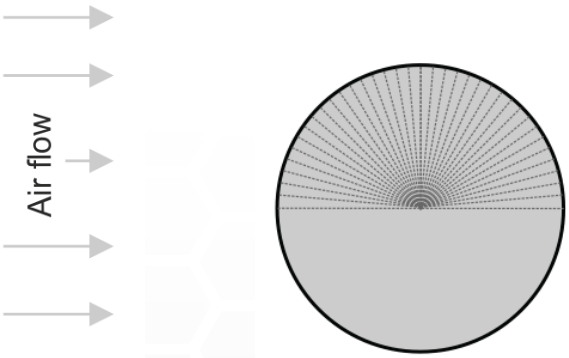

Pressure distribution diagram

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Angle of attack = 0º Fan speed = 25%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

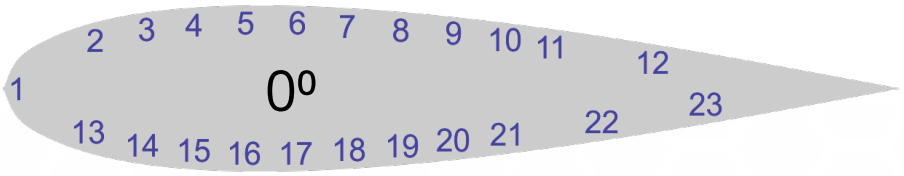

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Angle of attack = 5º Fan speed = 25%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

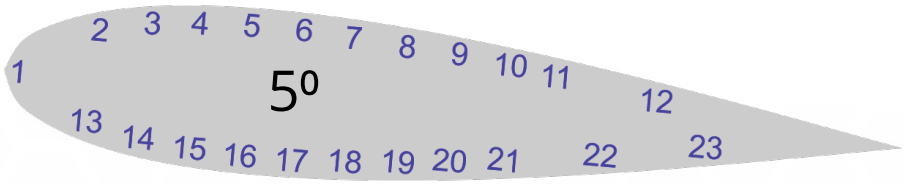

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Angle of attack = 12º Fan speed = 25%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

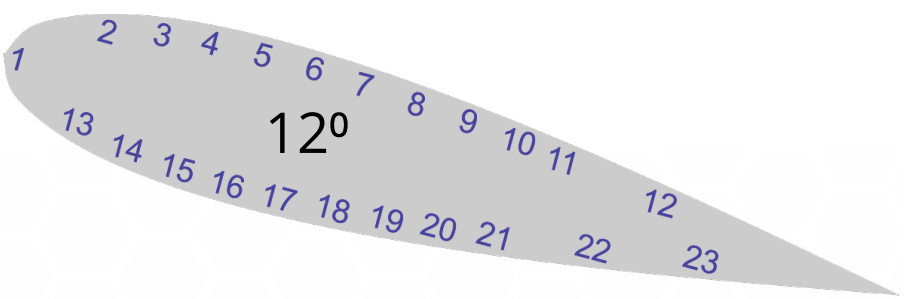

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 0º Fan speed = 50%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

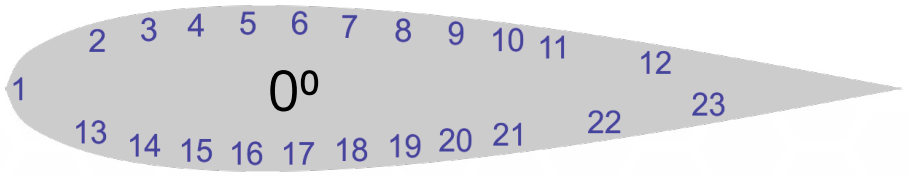

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 5⁰ Fan speed = 50%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

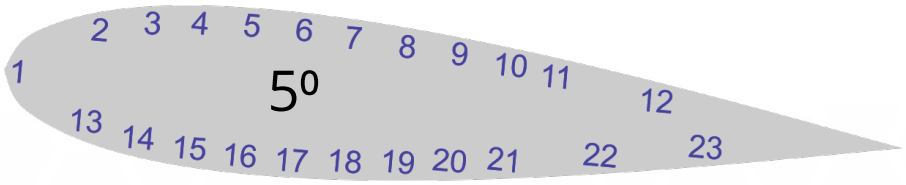

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 12º Fan speed = 50%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

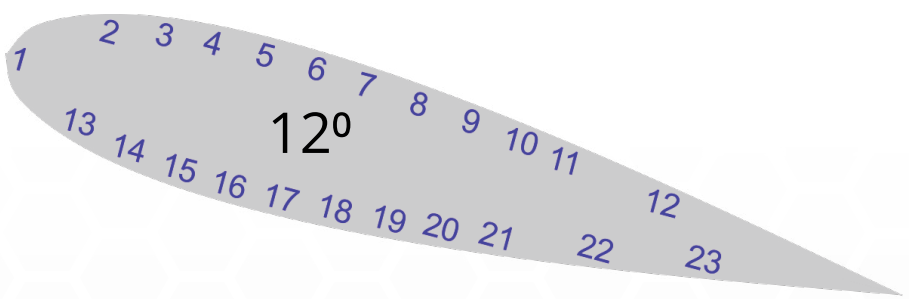

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 0º Fan speed = 80%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

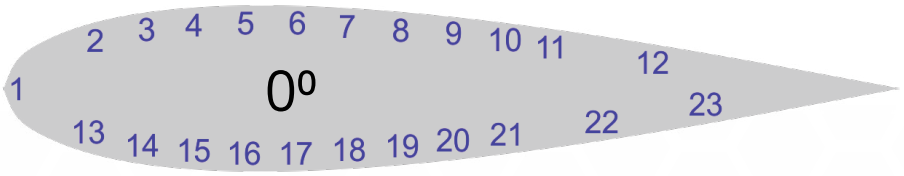

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 5⁰ Fan speed = 80%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

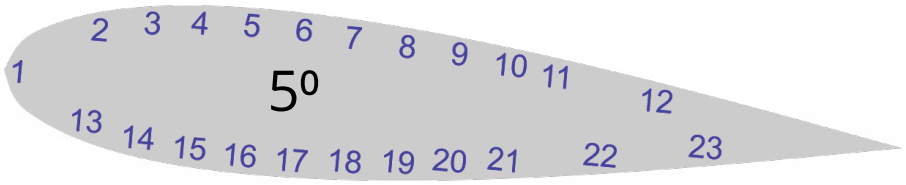

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 12º Fan speed = 80%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

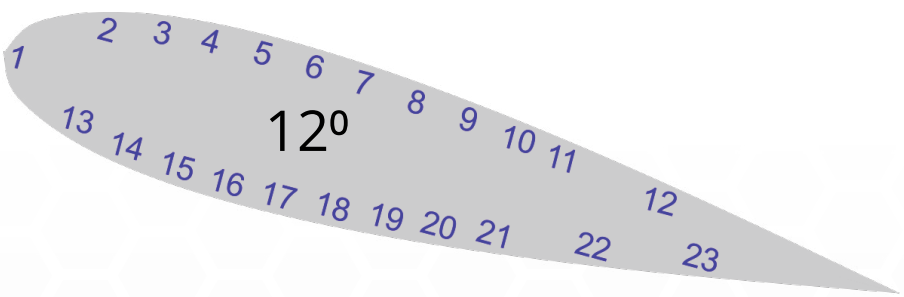

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 0º Fan speed = 100%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

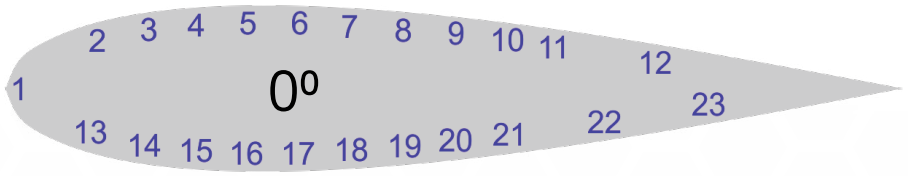

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 5⁰ Fan speed = 100%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

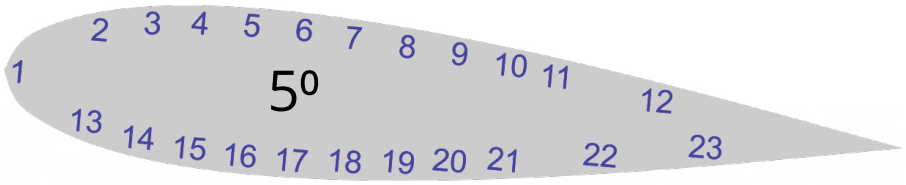

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

Challenge Angle of attack = 12º Fan speed = 100%


Upper surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
1	0		
2	0.01		
3	0.03		
4	0.06		
5	0.12		
6	0.18		
7	0.30		
8	0.40		
9	0.51		
10	0.60		
11	0.70		
12	0.80		

Lower surface:

Pressure tapping number	Fractional distance x along chord	Pressure p in Pa	Pressure coefficient Cp
13	0.01		
14	0.03		
15	0.06		
16	0.12		
17	0.18		
18	0.30		
19	0.40		
20	0.51		
21	0.60		
22	0.70		
23	0.80		

Pressure distribution diagram:

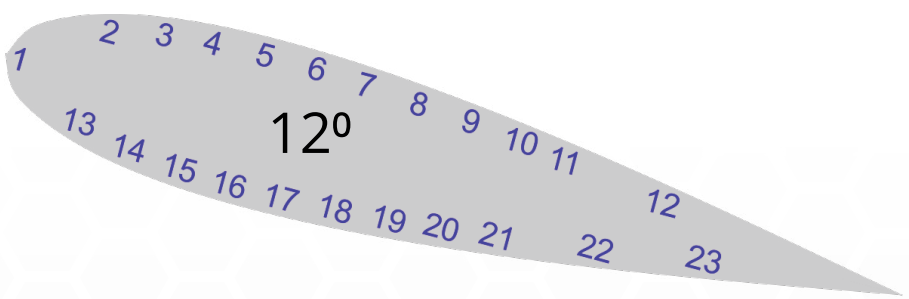

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 3 - Flow Patterns Around an Aerofoil

What do you deduce from the graphs of pressure distributions across the upper and lower surfaces of the aerofoil?

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 4 - Lift and Drag on an Aerofoil NACA0015

Fan speed = 20%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 50%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 80%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 4 - Lift and Drag on an Aerofoil S1223

Fan speed = 20%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 50%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 80%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 4 - Lift and Drag on an Aerofoil NACA4415

Fan speed = 20%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 50%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Fan speed = 80%

Angle of attack	Lift force in N	Drag force in N
-25º		
-20º		
-15º		
-10º		
-5º		
0º		
5º		
10º		
15º		
20º		
25º		
30º		
35º		
40º		
45º		

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 4 - Lift and Drag on an Aerofoil S1223

What do you deduce from the graphs of lift and drag versus angle of attack at the different air speeds?

How do the different aerofoils compare for lift and drag at a fan speed of 20%?

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 5 - Drag Coefficient

1. The cone

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

1. The smooth sphere

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 5 - Drag Coefficient

1. The half sphere

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

1. The rough sphere

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 5 - Drag Coefficient

1. The flat surface

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

1. The tear drop

Fan speed %	Air speed in m.s-1	Drag force in N	Drag coefficient
10			
20			
30			
40			
50			
60			
70			
80			
90			
100			

Copyright © 2023-2026 Matrix Technology Solutions Limited

Worksheet 5 - Drag Coefficient

What do you deduce from these results?

Which of these shapes is chosen by many car designers for the overall shape of a car?

Why are golf balls dimpled?

Copyright © 2023-2026 Matrix Technology Solutions Limited

Notes

Copyright © 2023-2026 Matrix Technology Solutions Limited

AERODYNAMICS

CP0704

www.matrixtsl.com

Matrix Technology Solutions
The Factory, 33 Gibbet Street, Halifax, HX1 5BA, United Kingdom
t: +44 (0) 1422 252380 e: sales@matrixtsl.com